


# Proportional reducing valves

digital, pilot operated, open loop, subplate or modular mounting

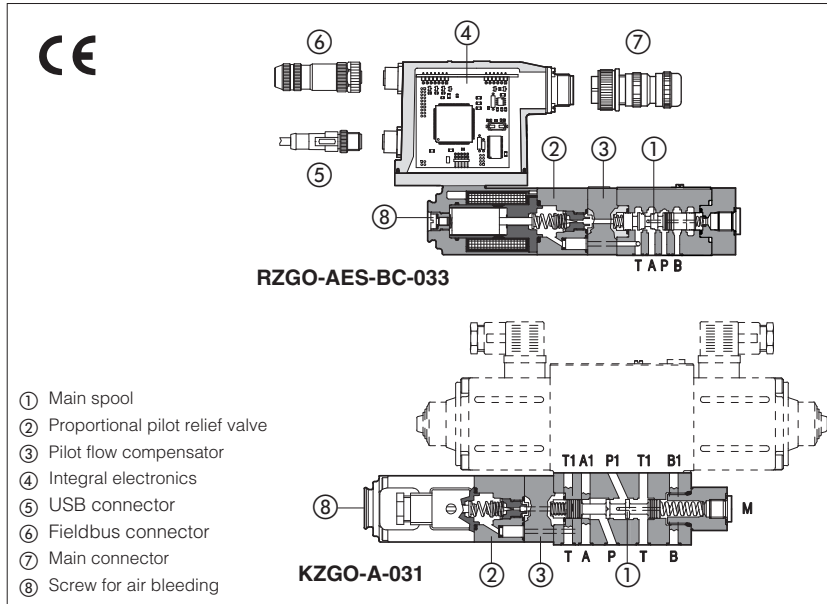

## RZGO-A, RZGO-AEB, RZGO-AES HZGO-A, KZGO-A

Spool type pilot operated digital proportional reducing valves for pressure open loop controls, available in subplate size 06 or modular mounting size 06 and 10 Executions:

- **A** without integral driver, to be coupled with separated driver, see section 2
- **AEB**, only for **RZGO**, with basic integral digital electronic driver, analog reference signals and USB port for software functional parameters setting
- **AES**, only for **RZGO**, with full integral digital electronic driver and fieldbus interface for functional parameters setting, reference signals and real-time diagnostics

The integral digital electronic driver performs the valve's hydraulic regulation according to the reference signal and assures valve-to-valve interchangeability thanks to the factory presetting

Size: **06** and **10**  
Max flow: **40** and **100 l/min**  
Max pressure: **350 bar**

### 1 MODEL CODE


|  |   |          |           |   |           |   |            |   |            |   |   |   |   |   |
|--|---|----------|-----------|---|-----------|---|------------|---|------------|---|---|---|---|---|
| <b>RZGO</b>  | - | <b>A</b> | <b>EB</b> | - | <b>NP</b> | - | <b>033</b> | / | <b>210</b> | / | * | **  | / | * |
| <p>Proportional pressure reducing valves</p> <p><b>RZGO</b> subplate, size 06<br/><b>HZGO</b> modular, size 06<br/><b>KZGO</b> modular, size 10</p> <p><b>A</b> = open loop pressure control</p> <p>- = omit for execution with separated driver see section 2</p> <p>only for <b>RZGO</b>:<br/><b>EB</b> = basic integral driver<br/><b>ES</b> = full integral driver</p> <p><b>Fieldbus interfaces</b> - USB port always present (1):<br/><b>NP</b> = Not present      <b>BP</b> = PROFIBUS DP<br/><b>BC</b> = CANopen        <b>EH</b> = EtherCAT</p> <p><b>Configuration:</b><br/><b>031</b> = regulation on port P1, discharge in T (only for HZGO, KZGO)<br/><b>033</b> = regulation on port A, discharge in T (only for RZGO)</p> |   |          |           |   |           |   |            |   |            |   |   | <p>Seals material, see sect. 5, 6:</p> <p>- = NBR<br/><b>PE</b> = FKM<br/><b>BT</b> = HNBR</p> <p>Series number</p>   |   |   |
| <p><b>Coil voltage</b> only for <b>-A</b> - see section 8:</p> <p>- = standard coil for 24V<sub>DC</sub> Atos drivers<br/><b>6</b> = optional coil for 12V<sub>DC</sub> Atos drivers<br/><b>18</b> = optional coil for low current drivers</p> <p><b>Electronics options</b><br/>only for <b>AEB</b> and <b>AES</b> - see section 9:</p> <p><b>I</b> = current reference input 4 ÷ 20 mA<br/>(omit for standard voltage reference input 0 ÷ 10 V)<br/><b>Q</b> = enable signal<br/><b>Z</b> = double power supply, enable, fault and monitor signals - 12 pin connector</p>  |   |          |           |   |           |   |            |   |            |   |   | <p><b>Max regulated pressure:</b></p> <p><b>50</b> = 50 bar (not for KZGO)      <b>210</b> = 210 bar      <b>350</b> = 350 bar<br/><b>100</b> = 100 bar                      <b>315</b> = 315 bar</p> |   |   |

(1) Omit for **A** execution; **AEB** available only in version **NP**; **AES** available only in version **BC**, **BP**, **EH**

### 2 ELECTRONIC DRIVERS

| Valve model   | A                   |                   |             |                       |                     |                |          | AEB               | AES      |
|---------------|---------------------|-------------------|-------------|-----------------------|---------------------|----------------|----------|-------------------|----------|
| Drivers model | E-MI-AC-01F         | E-BM-AC-01F       | E-ME-AC-01F | E-RP-AC-01F           | E-MI-AS-IR          | E-BM-AS-PS     | E-BM-AES | E-RI-AEB          | E-RI-AES |
| Type          | Analog              |                   |             |                       | Digital             |                |          |                   |          |
| Format        | plug-in to solenoid | DIN 43700 UNDECAL | EUROCARD    | sealed and rugged box | plug-in to solenoid | DIN-rail panel |          | Integral to valve |          |
| Data sheet    | G010                | G025              | G035        | G100                  | G020                | G030           | GS050    | GS115             |          |

**Note:** for main and communication connectors see sections 12, 13

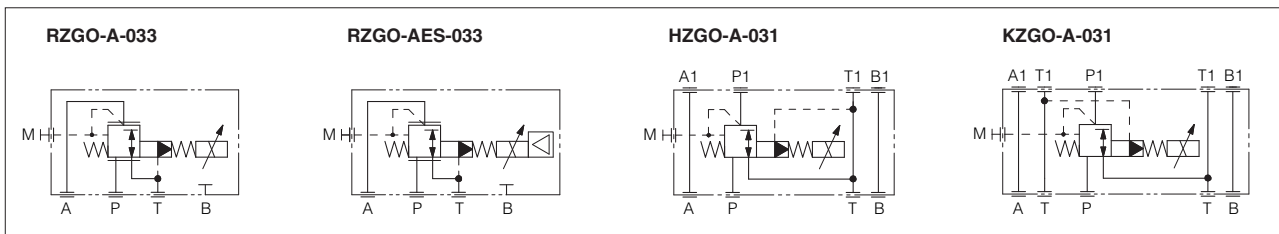

**3 GENERAL NOTES**

RZGO-A\*, HZGO-A\*, KZGO-A\* proportional valves are CE marked according to the applicable Directives (e.g. Immunity/Emission EMC Directive and Low Voltage Directive).

Installation, wirings and start-up procedures must be performed according to the general prescriptions shown in table F003 and in the installation notes supplied with relevant components.

**4 FIELDBUS - only for AES**

Fieldbus allows the direct communication of the proportional valve with machine control unit for digital reference signal, diagnostics and settings of functional parameters. Analog reference signal remain available on the main connector for quick commissioning and maintenance. For detailed information about fieldbus features and specification see tech table **GS510**.

**5 MAIN CHARACTERISTICS - based on mineral oil ISO VG 46 at 50 °C**

|  |   |                                   |                                   |   |
|--|---|-----------------------------------|-----------------------------------|---|
| Assembly position                            | Any position  |                                   |                                   |   |
| Subplate surface finishing                   | Roughness index, Ra 0,4 flatness ratio 0,01/100 (ISO 1101)  |                                   |                                   |   |
| MTTFd valves according to EN ISO 13849       | 75 years, see technical table P007  |                                   |                                   |   |
| Ambient temperature range                    | <b>A:</b> standard = -20°C ÷ +70°C,   |                                   | <b>/BT</b> option = -40°C ÷ +60°C |   |
|  | <b>AEB, AES:</b> standard = -20°C ÷ +60°C,  |                                   | <b>/BT</b> option = -40°C ÷ +60°C |   |
| Storage temperature range                    | <b>A:</b> standard = -20°C ÷ +80°C,   |                                   | <b>/BT</b> option = -40°C ÷ +70°C |   |
|  | <b>AEB, AES:</b> standard = -20°C ÷ +70°C,  |                                   | <b>/BT</b> option = -40°C ÷ +70°C |   |
| Coil resistance R at 20°C                    | Standard = 3 ÷ 3,3 Ω  | Option /6 = 2 ÷ 2,2 Ω             | Option /18 = 13 ÷ 13,4 Ω          |   |
| Max. solenoid current                        | Standard = 2,6 A  | Option /6 = 3,25 A                | Option /18 = 1,5 A                |   |
| Max. power                                   | <b>A</b> = 30 Watt <b>AEB, AES</b> = 50 Watt  |                                   |                                   |   |
| Insulation class                             | H (180°) Due to the occurring surface temperatures of the solenoid coils, the European standards ISO 13732-1 and EN982 must be taken into account |                                   |                                   |   |
| Protection degree to DIN EN60529             | IP66/67 with mating connectors  |                                   |                                   |   |
| Tropicalization (only AEB, AES)              | Tropical coating on electronics PCB   |                                   |                                   |   |
| Duty factor                                  | Continuous rating (ED=100%)   |                                   |                                   |   |
| EMC, climate and mechanical load             | See technical table G004  |                                   |                                   |   |
| Communication interface (only AEB, AES)      | USB<br>Atos ASCII coding  | CANopen<br>EN50325-4 + DS408      | PROFIBUS DP<br>EN50170-2/IEC61158 | EtherCAT<br>IEC 61158                   |
| Communication physical layer (only AEB, AES) | not insulated<br>USB 2.0 + USB OTG  | optical insulated<br>CAN ISO11898 | optical insulated<br>RS485        | Fast Ethernet, insulated<br>100 Base TX |

| Valve model  | RZGO-A, -AE, -AES, HZGO-A |     |     |     |     | KZGO-A |     |     |     |
|--|---------------------------|-----|-----|-----|-----|--------|-----|-----|-----|
|  | 50                        | 100 | 210 | 315 | 350 | 100    | 210 | 315 | 350 |
| Max regulated pressure [bar]   |                           |     |     |     |     |        |     |     |     |
| Min. regulated pressure (1) [bar]  | 1,0 ; 3,0 (only for /350) |     |     |     |     |        |     |     |     |
| Max. pressure at port P [bar]  | 350                       |     |     |     |     |        |     |     |     |
| Max. pressure at port T [bar]  | 210                       |     |     |     |     |        |     |     |     |
| Min. flow [l/min]  | 2,5                       |     |     |     |     | 3      |     |     |     |
| Max. flow [l/min]  | 40                        |     |     |     |     | 100    |     |     |     |
| Response time 0-100% step signal (2) [ms]<br>(depending on installation) | ≤ 50                      |     |     |     |     | ≤ 80   |     |     |     |
| Hysteresis [% of the max pressure]                                       |                           |     |     |     |     | ≤ 2    |     |     |     |
| Linearity [% of the max pressure]  |                           |     |     |     |     | ≤ 3    |     |     |     |
| Repeatability [% of the max pressure]                                    |                           |     |     |     |     | ≤ 2    |     |     |     |

**Notes:** above performance data refer to valves coupled with Atos electronic drivers, see section 2

(1) Min pressure values to be increased of T line pressure

(2) Average response time value; the pressure variation in consequence of a modification of the reference input signal to the valve is affected by the stiffness of the hydraulic circuit: greater is the stiffness of the circuit, faster is the dynamic response

**5 SEALS AND HYDRAULIC FLUID** - for other fluids not included in below table, consult our technical office

|                                      |   |                            |                      |
|--------------------------------------|---|----------------------------|----------------------|
| Seals, recommended fluid temperature | NBR seals (standard) = -20°C ÷ +60°C, with HFC hydraulic fluids = -20°C ÷ +50°C<br>FKM seals (/PE option) = -20°C ÷ +80°C<br>HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C |                            |                      |
| Recommended viscosity                | 20 ÷ 100 mm <sup>2</sup> /s - max allowed range 15 ÷ 380 mm <sup>2</sup> /s   |                            |                      |
| Fluid contamination class            | ISO 4406 class 20/18/15 NAS 1638 class 9, achievable with in line filter - 10 µm (β <sub>10</sub> ≥ 75 recommended)   |                            |                      |
| <b>Hydraulic fluid</b>               | <b>Suitable seals type</b>  | <b>Classification</b>      | <b>Ref. Standard</b> |
| Mineral oils                         | NBR, FKM, HNBR  | HL, HLP, HLPD, HVLP, HVLPD | DIN 51524            |
| Flame resistant without water        | FKM   | HFDR, HFDR                 | ISO 12922            |
| Flame resistant with water           | NBR, HNBR   | HFC                        |                      |

**6 DIAGRAMS** (based on mineral oil ISO VG 46 at 50 °C)



**6.1 Regulation diagrams**

with flow rate Q = 10 l/min

- 1 = RZGO, HZGO
- 2 = KZGO

**Note:**


The presence of counter pressure at port T can affect the effective pressure regulation.

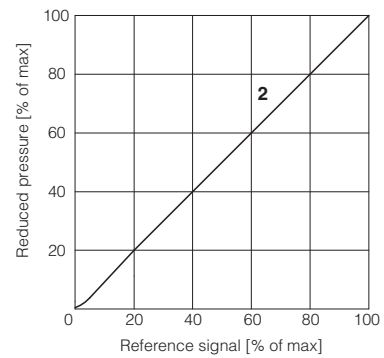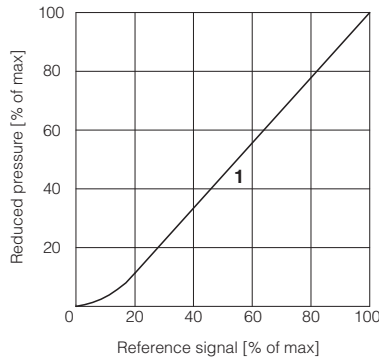

**6.2 Pressure/flow diagrams**

with reference pressure set with Q = 10 l/min

- 3 = RZGO, KZGO

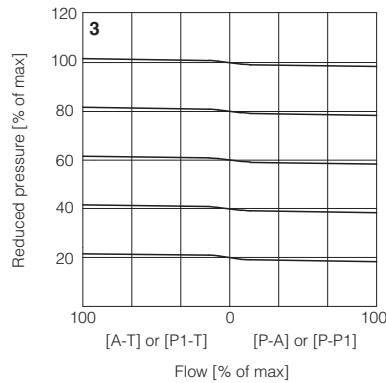



**6.3 Pressure drop/flow diagram**

RZGO, HZGO

- 4 = A-T or P1-T (dotted line /350)
- 5 = P-P1 or P-A

KZGO

- 6 = P1-T (dotted line /350)
- 7 = P-P1

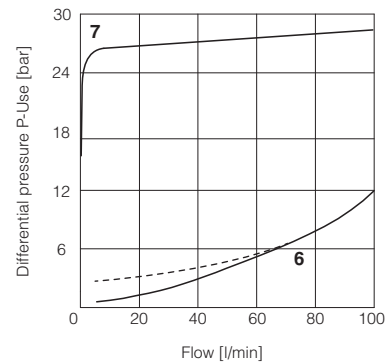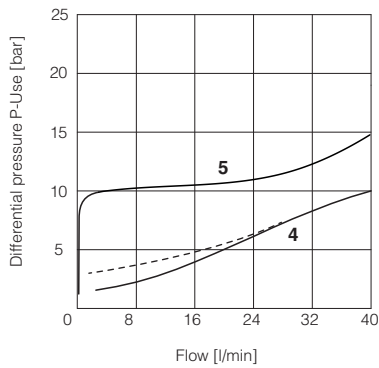

## 7 OPTIONS FOR -A EXECUTION


**7.1 Option /6** optional coil to be used with Atos drivers with power supply 12 Vdc

**7.2 Option /18** optional coil to be used with electronic drivers not supplied by Atos

## 8 AIR BLEEDING

At the first valve commissioning the air eventually trapped inside the solenoid must be bled-off through the screw ① located at the rear side of the solenoid housing.

The presence of air may cause pressure instability and vibrations.

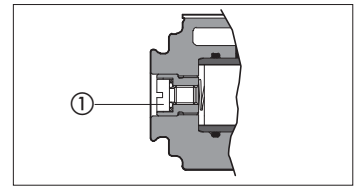

## 9 ELECTRONIC OPTIONS

Standard driver execution provides on the 7 pin main connector:

**Power supply** - 24Vdc must be appropriately stabilized or rectified and filtered; a 2,5 A fuse time lag is required in series to each driver power supply. Apply at least a 10000  $\mu$ F/40 V capacitance to single phase rectifiers or a 4700  $\mu$ F/40 V capacitance to three phase rectifiers

**Reference input signal** - analog differential input with 0÷+10 Vdc nominal range (pin D,E), proportional to desired valve pressure regulation

**Monitor output signal** - analog output signal proportional to the actual valve's coil current (1V monitor = 1A coil current)

**Note:** a minimum booting time of 500 ms has to be considered from the driver energizing with the 24 VDC power supply before the valve has been ready to operate. During this time the current to the valve coils is switched to zero.

### 9.1 Option /I

It provides 4 ÷ 20 mA current reference signal, instead of the standard 0÷+10 Vdc.

Input signal can be reconfigured via software selecting between voltage and current, within a maximum range of  $\pm 10$  V or  $\pm 20$  mA.

It is normally used in case of long distance between the machine control unit and the valve or where the reference signal can be affected by electrical noise; the valve functioning is disabled in case of reference signal cable breakage

### 9.2 Option /Q

To enable the driver, supply 24 VDC on pin C referred to pin B: Enable input signal allows to enable/disable the current supply to the solenoid, without removing the electrical power supply to the driver; it is used to maintain active the communication and the other driver functions when the valve has to be disabled. This condition does not comply with European Norms EN13849-1 (ex EN954-1).

### 9.3 Option /Z

It provides, on the 12 pin main connector, the following additional features:

#### Enable Input Signal

To enable the driver, supply 24 VDC on pin 3 referred to pin 2: Enable input signal allows to enable/disable the current supply to the solenoid, without removing the electrical power supply to the driver; it is used to maintain active the communication and the other driver functions when the valve has to be disabled. This condition does not comply with European Norms EN13849-1 (ex EN954-1).

#### Fault Output Signal

Fault output signal indicates fault conditions of the driver (solenoid short circuits/not connected, reference signal cable broken for 4÷20mA input, etc.). Fault presence corresponds to 0 VDC, normal working corresponds to 24 VDC (pin 11 referred to pin 2): Fault status is not affected by the Enable input signal

#### Power supply for driver's logics and communication

Separate power supply (pin 9,10) allow to cut solenoid power supply (pin 1,2) while maintaining active diagnostics, USB and fieldbus communication.

A safety fuse is required in series to each driver power supply: 500 mA fast fuse.

### 9.4 Possible combined options: /IQ, /IZ

## 10 PROGRAMMING TOOLS - see tech table GS500

Valve's functional parameters and configurations, can be easily set and optimized using Atos E-SW programming software connected via USB port to the digital driver. For fieldbus versions, the software permits valve's parameterization through USB port also if the driver is connected to the central machine unit via fieldbus.

The software is available in different versions according to the driver's options:

**E-SW-BASIC** support: NP (USB) PS (Serial) IR (Infrared)


**E-SW-FIELDBUS** support: BC (CANopen) BP (PROFIBUS DP) EH (EtherCAT)  
EW (POWERLINK)

**E-SW-\*/PQ** support: valves with SP, SF, SL alternated control (e.g. E-SW-BASIC/PQ)

**WARNING: drivers USB port is not isolated!**

The use of isolator adapter is highly recommended for PC protection (see table GS500)

### USB connection

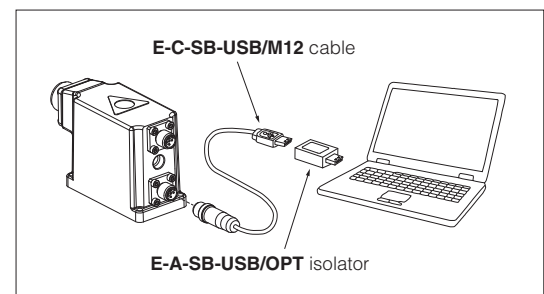

## 11 ELECTRONIC CONNECTIONS

### 11.1 Main connector signals - 7 pin - standard and /Q option - RZGO-AEB and RZGO-AES (A1)

| PIN | Standard                          | /Q     | TECHNICAL SPECIFICATIONS   | NOTES  |
|-----|-----------------------------------|--------|--|--|
| A   | V+                                |        | Power supply 24 Vdc Rectified and filtered: $V_{RMS} = 20 \div 32 V_{MAX}$ (ripple max 10 % $V_{PP}$ )   | Input - power supply                                 |
| B   | V0                                |        | Power supply 0 Vdc   | Gnd - power supply                                   |
| C   | AGND                              |        | Analog ground  | Gnd - analog signal                                  |
|     |                                   | ENABLE | Enable (24 Vdc) or disable (0 Vdc) the driver, referred to V0  | Input - on/off signal                                |
| D   | INPUT+                            |        | Pressure reference input signal: $\pm 10 V_{dc}$ / $\pm 20$ mA maximum range<br>Defaults are 0 $\div$ 10 Vdc for standard and 4 $\div$ 20 mA for /I option | Input - analog signal<br><b>Software selectable</b>  |
| E   | INPUT-                            |        | Negative reference input signal for P_INPUT+   | Input - analog signal                                |
| F   | MONITOR referred to:<br>AGND   V0 |        | Pressure monitor output signal: $\pm 5 V_{dc}$ maximum range<br>Default is 0 $\div$ 5 Vdc (1V = 1A)  | Output - analog signal<br><b>Software selectable</b> |
| G   | EARTH                             |        | Internally connected to driver housing   |  |

### 11.2 Main connector signals - 12 pin - /Z option - RZGO-AEB and RZGO-AES (A2)

| PIN | /Z      | TECHNICAL SPECIFICATIONS   | NOTES  |
|-----|---------|--|--|
| 1   | V+      | Power supply 24 Vdc Rectified and filtered: $V_{RMS} = 20 \div 32 V_{MAX}$ (ripple max 10 % $V_{PP}$ )   | Input - power supply                                 |
| 2   | V0      | Power supply 0 Vdc   | Gnd - power supply                                   |
| 3   | ENABLE  | Enable (24 Vdc) or disable (0 Vdc) the driver, referred to V0  | Input - on/off signal                                |
| 4   | INPUT+  | Pressure reference input signal: $\pm 10 V_{dc}$ / $\pm 20$ mA maximum range<br>Defaults are 0 $\div$ 10 Vdc for standard and 4 $\div$ 20 mA for /I option | Input - analog signal<br><b>Software selectable</b>  |
| 5   | INPUT-  | Negative reference input signal for P_INPUT+   | Input - analog signal                                |
| 6   | MONITOR | Pressure monitor output signal: $\pm 5 V_{dc}$ maximum range<br>Defaults is 0 $\div$ 5 Vdc (1V = 1A)   | Output - analog signal<br><b>Software selectable</b> |
| 7   | NC      | Do not connect   |  |
| 8   | NC      | Do not connect   |  |
| 9   | VL+     | Power supply 24 Vdc for driver's logic and communication   | Input - power supply                                 |
| 10  | VLO     | Power supply 0 Vdc for driver's logic and communication  | Gnd - power supply                                   |
| 11  | FAULT   | Fault (0 Vdc) or normal working (24 Vdc), referred to V0   | Output - on/off signal                               |
| PE  | EARTH   | Internally connected to driver housing   |  |

### 11.3 Communication connectors - RZGO-AEB (B) and RZGO-AES (B) (C)

| (B) USB connector - M12 - 5 pin always present |         |                             |
|--|---------|-----------------------------|
| PIN  | SIGNAL  | TECHNICAL SPECIFICATION (1) |
| 1  | +5V_USB | Power supply                |
| 2  | ID      | Identification              |
| 3  | GND_USB | Signal zero data line       |
| 4  | D-      | Data line -                 |
| 5  | D+      | Data line +                 |

| (C1) BC fieldbus execution, connector - M12 - 5 pin (2) |          |                             |
|---|----------|-----------------------------|
| PIN   | SIGNAL   | TECHNICAL SPECIFICATION (1) |
| 1   | CAN_SHLD | Shield                      |
| 2   | NC       | do not connect              |
| 3   | CAN_GND  | Signal zero data line       |
| 4   | CAN_H    | Bus line (high)             |
| 5   | CAN_L    | Bus line (low)              |

| (C2) BP fieldbus execution, connector - M12 - 5 pin (2) |        |                                       |
|---|--------|---------------------------------------|
| PIN   | SIGNAL | TECHNICAL SPECIFICATION (1)           |
| 1   | +5V    | Termination supply signal             |
| 2   | LINE-A | Bus line (high)                       |
| 3   | DGND   | Data line and termination signal zero |
| 4   | LINE-B | Bus line (low)                        |
| 5   | SHIELD |                                       |


| (C3) (C4) EH fieldbus execution, connector - M12 - 4 pin (2) |        |                             |
|--|--------|-----------------------------|
| PIN  | SIGNAL | TECHNICAL SPECIFICATION (1) |
| 1  | TX+    | Transmitter                 |
| 2  | RX+    | Receiver                    |
| 3  | TX-    | Transmitter                 |
| 4  | RX-    | Receiver                    |
| Housing  | SHIELD |                             |

Notes: (1) shield connection on connector's housing is recommended (2) only for AES execution


### 11.4 Solenoid connection - only for RZGO-A, HZGO-A, KZGO,A

| PIN | SIGNAL | TECHNICAL SPECIFICATION | Connector code 666 |
|-----|--------|-------------------------|--------------------|
| 1   | COIL   | Power supply            |                    |
| 2   | COIL   | Power supply            |                    |
| 3   | GND    | Ground                  |                    |

11.5 Connections layout - only for AEB and AES

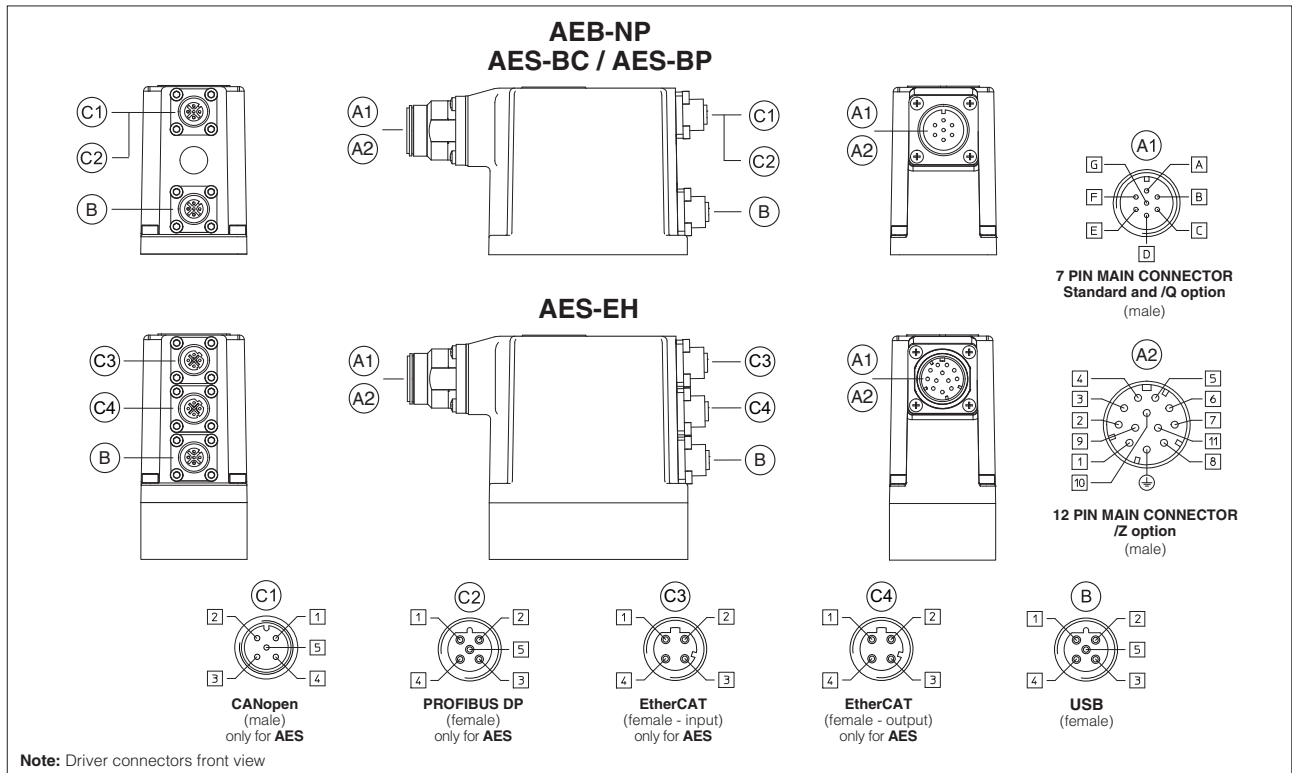

12 CONNECTORS

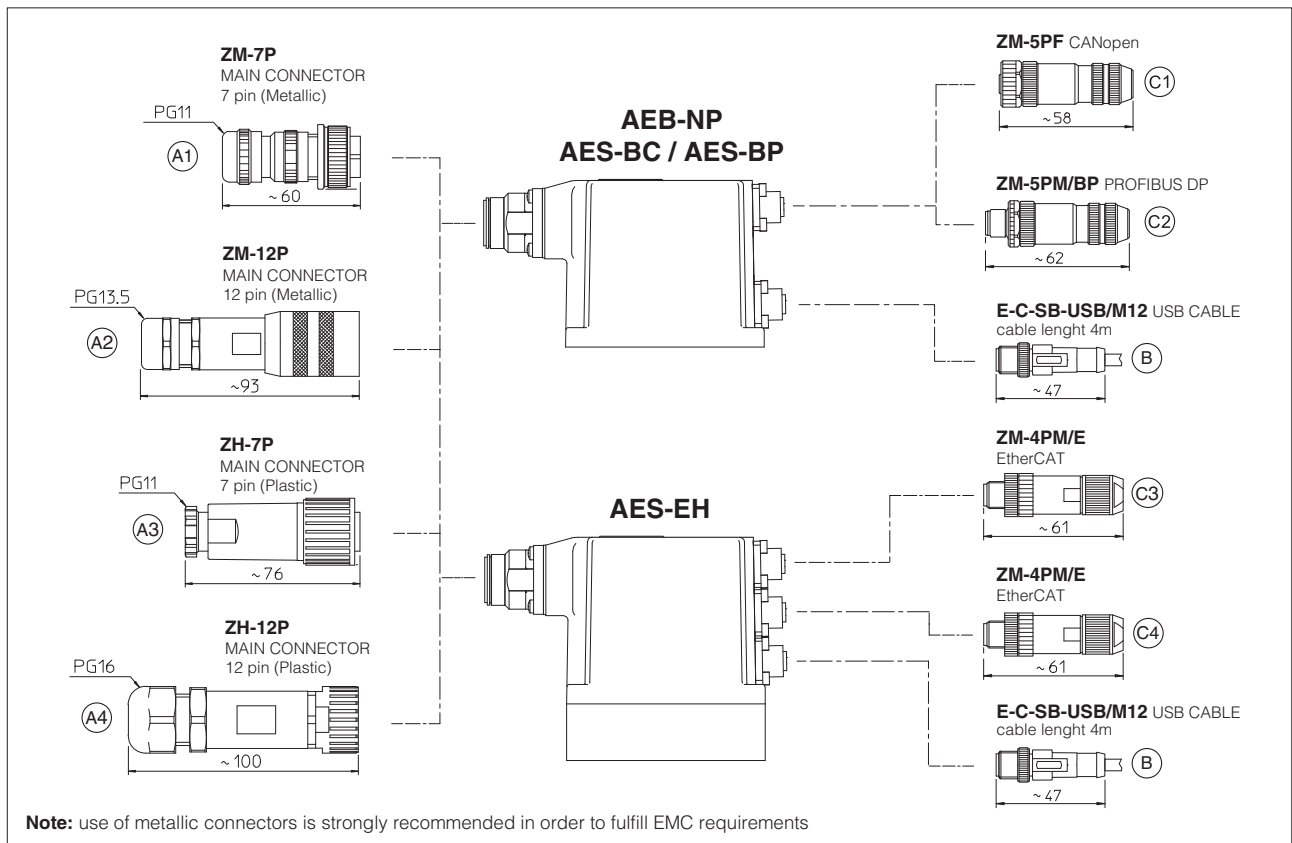

13 MODEL CODES OF MAIN CONNECTORS AND COMMUNICATION CONNECTORS - to be ordered separately

| VALVE VERSION     | A (1)<br>Power supply | AEB<br>AES  | AEB/Z<br>AES/Z | BC - CANopen | BP - PROFIBUS DP | EH - EtherCAT |
|-------------------|-----------------------|-------------|----------------|--------------|------------------|---------------|
| CONNECTOR CODE    | 666                   | ZM-7P (A1)  | ZM-12P (A2)    | ZM-5PF (C1)  | ZM-5PM/BP (C2)   | ZM-4PM/E (C3) |
|                   |                       | ZH-7P (A3)  | ZH-12P (A4)    |              |                  | ZM-4PM/E (C4) |
| PROTECTION DEGREE | IP67                  | IP67        |                |              |                  |               |
| DATA SHEET        | K500                  | GS115, K500 |                |              |                  |               |

(1) Connectors supplied with the valve

only for AES

14 INSTALLATION DIMENSIONS [mm]

**ISO 4401: 2000**

**Mounting surface: 4401-03-02-0-05**  
(see table P005)

Fastening bolts:





4 socket head screws M5X50 bolts class 12.9

Tightening torque = 8 Nm

Seals: 4 OR 108

Ports P, A, T:  $\varnothing = 7,5$  mm

Port B not used

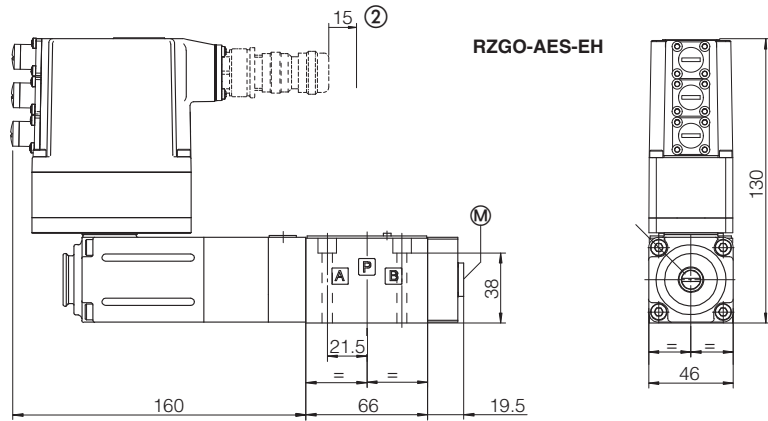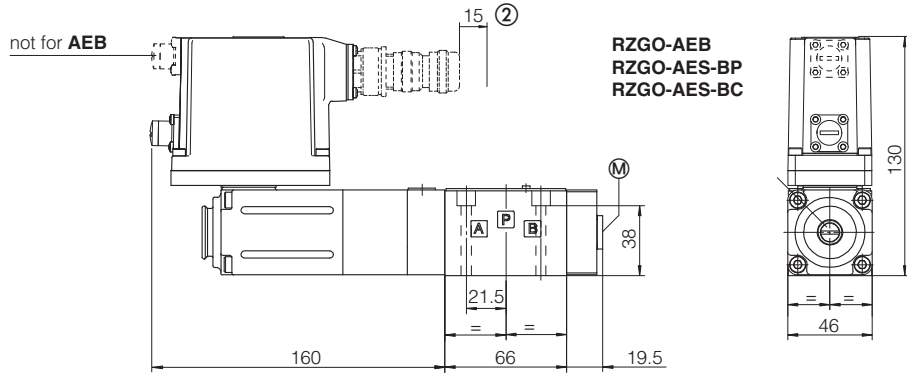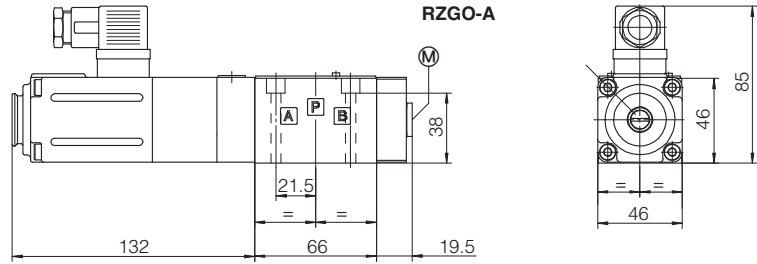

**ISO 4401: 2000**


**Mounting surface: 4401-03-02-0-05**  
(see tab. P005)

Fastening bolts: M5 class 12.9

Tightening torque = 8 Nm

Seals: 4 OR 108

Ports P, A, B, T:  $\varnothing = 6,5$  mm

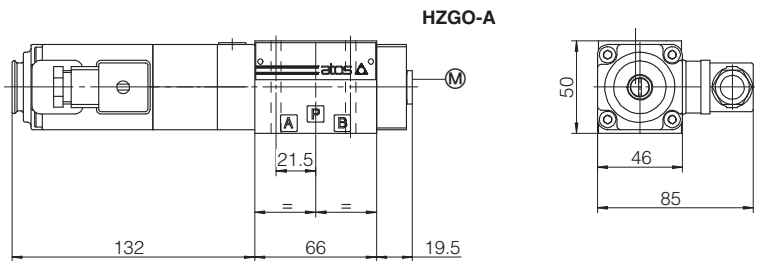

**ISO 4401: 2000**


**Mounting surface: 4401-05-04-0-05**  
(see tab. P005)

Fastening bolts: M6 class 12.9

Tightening torque = 15 Nm

Seals: 5 OR 2050.1 OR 108

Ports P,A,B,T:  $\varnothing = 10,5$  mm (max)

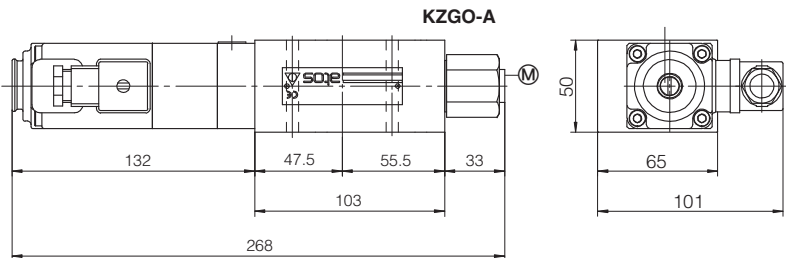

Ⓜ = Pressure gauge connection port = G<sup>1</sup>/<sub>4</sub>"

① = Screw for air bleeding: at the first valve commissioning the air eventually trapped inside the solenoid must be bled-off through the screw ①

② = Space to remove the 7 or 12 pin main connector. For main and communication connectors see section 12, 13