


Proportional relief valves

direct operated, ISO 4401 size 06 subplate mounting or M20 screw-in cartridge execution

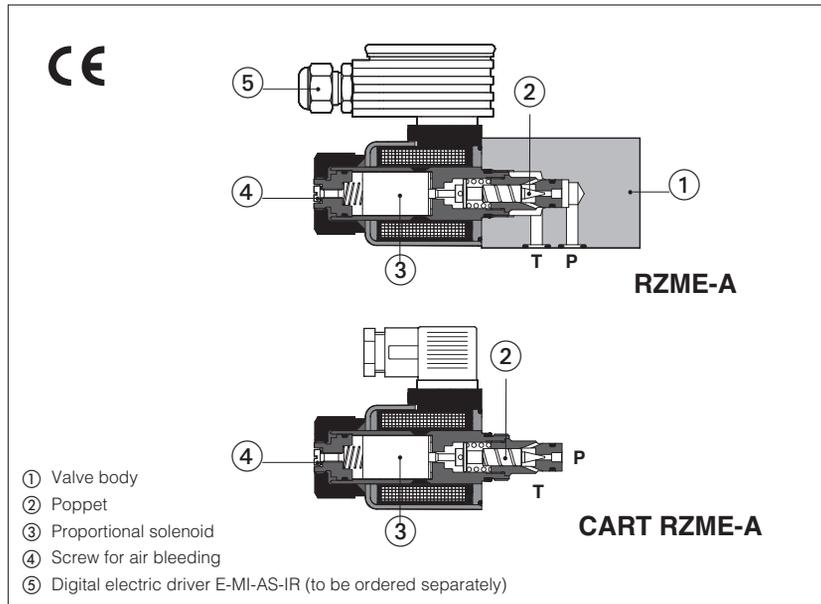

RZME-A, CART RZME-A

Open loop, poppet type direct operated proportional pressure relief valves with proportional solenoids certified according to North American standard **cURus**.

They operate in association with electronic drivers, see section ②, which supply the proportional valves with proper current to align the valve regulation to the reference signal.

They are available in following executions:

RZME: subplate mounting, ISO size 06

CART RZME: M20 cartridge execution

The solenoid coils are plastic encapsulated with insulation class H and they are available with different nominal resistances depending to the voltage supply (12 V_{DC} or 24 V_{DC}) and to the electronic driver type, see section ② and ③.

Mounting surface RZME: **ISO 4401 size 06**

Cavity CART RZME: see section ⑨

Max flow = **4 l/min**

Max pressure = **350 bar**

1 MODEL CODE


| | | | | | | | | | | | | | |
|---|---|----------|---|------------|---|------------|---|----------|---|----------|-----------|---|----------|
| RZME | - | A | - | 010 | / | 315 | - | * | / | * | ** | / | * |
| <p>Proportional pressure relief valve RZME = subplate mounting CART RZME = cartridge execution</p> | | | | | | | | | | | | | |
| <p>A = open loop pressure control</p> | | | | | | | | | | | | | |
| <p>Configuration: 010 = regulation on port P, discharge in T</p> | | | | | | | | | | | | | |
| <p>Max regulated pressure: 50 = 50 bar 100 = 100 bar 210 = 210 bar 315 = 315 bar 350 = 350 bar</p> | | | | | | | | | | | | | |
| <p>Seals material, see section ④: - = NBR PE = FKM BT = HNBR</p> | | | | | | | | | | | | | |
| <p>Series number</p> | | | | | | | | | | | | | |
| <p>Coil voltage see section ② and ③: - = standard coil for 24V_{DC} Atos drivers 6 = optional coil for 12V_{DC} Atos drivers 18 = optional coil for low current drivers</p> | | | | | | | | | | | | | |
| <p>Coils with special connectors, see section ⑨ - = omit for standard DIN connector J = AMP Junior Timer connector K = Deutsch connector S = Lead Wire connection</p> | | | | | | | | | | | | | |

2 ELECTRONIC DRIVERS

| Drivers model | E-MI-AC (1) | | E-MI-AS-IR (1) | | E-BM-AC | | E-BM-AS-PS | | E-BM-AES | E-ME-AC |
|-----------------------------------|----------------------------------|-----|----------------|-----|----------------------|-----|----------------|-----|----------|----------|
| Type | analog | | digital | | analog | | digital | | digital | analog |
| Voltage supply (V _{DC}) | 12 | 24 | 12 | 24 | 12 | 24 | 12 | 24 | 24 | 24 |
| Valve coil option | /6 | std | /6 | std | /6 | std | /6 | std | std | std |
| Format | DIN 43650 plug-in to solenoid | | | | DIN 43700 UNDECAL | | DIN-rail panel | | | EUROCARD |
| Data sheet | G010 | | G020 | | G025 | | G030 | | GS050 | G035 |

(1) for **CART RZME** the electronic driver may interfere with the manifold surface. Please check the installation dimensions at section ⑩

3 HYDRAULIC CHARACTERISTICS (based on mineral oil ISO VG 46 at 50 °C)

| | | | |
|-----------------------------------|--|---|--|
| Hydraulic symbols |  RZME-A CART RZME-A | | |
| Assembly position / location | Any position | | |
| Subplate surface finishing (RZME) | Roughness index Ra 0,4 - flatness ratio 0,01/100 (ISO 1101) | | |
| Ambient temperature | Standard = -20°C ÷ +70°C; /PE option = -20°C ÷ +70°C; /BT option = -40°C ÷ +70°C | | |
| Coil code | Standard | option /6 optional coil to be used with Atos drivers with power supply 12 Vdc | option /18 optional coil to be used with electronic drivers not supplied by Atos, with power supply 24 Vdc and max current limited to 1A |
| Coil resistance R at 20°C | 3 ÷ 3,3 Ω | 2 ÷ 2,2 Ω | 13 ÷ 13,4 Ω |
| Max. solenoid current | 2,2 A | 2,75 A | 1 A |
| Max. power | 30 Watt | | |
| Protection degree (CEI EN-60529) | IP65 | | |
| Duty factor | Continuous rating (ED=100%) | | |
| Certification | cURus North American Standard | | |

| Valve size | 10 | 20 | 32 |
|---|--|-----|-----|
| Max regulated pressure | 50; 100; 210; 315; 350 | | |
| Min. regulated pressure [bar] | see min. pressure / flow diagrams at sect. 7 | | |
| Max. pressure at port P [bar] | 350 | | |
| Max. pressure at port T [bar] | 210 | | |
| Max. flow [l/min] | 200 | 400 | 600 |
| Response time 0-100% step signal (1) [ms] (depending on installation) | 120 | 135 | 150 |
| Hysteresis [% of the max pressure] | ≤ 1,5 | | |
| Linearity [% of the max pressure] | ≤ 3 | | |
| Repeatability [% of the max pressure] | ≤ 2 | | |

Notes: above performance data refer to valves coupled with Atos electronic drivers, see section 2.

- (1) Average response time values; the pressure variation in consequence of a modification of the reference input signal to the valve is affected by the stiffness of the hydraulic circuit: greater is the stiffness of the circuit, faster is the dynamic response.

4 SEALS AND HYDRAULIC FLUID

| | | | |
|--------------------------------------|---|----------------------------|----------------------|
| Seals, recommended fluid temperature | NBR seals (standard) = -20°C ÷ +60°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C | | |
| Recommended viscosity | 20 ÷ 100 mm ² /s - max allowed range 15 ÷ 380 mm ² /s | | |
| Fluid contamination class | ISO 4406 class 20/18/15 NAS 1638 class 9, in line filters of 10 μm (β ₁₀ ≥ 75 recommended) | | |
| Hydraulic fluid | Suitable seals type | Classification | Ref. Standard |
| Mineral oils | NBR, FKM, HNBR | HL, HLP, HLPD, HVLP, HVLDP | DIN 51524 |
| Flame resistant without water | FKM | HFDU, HFDR | ISO 12922 |
| Flame resistant with water | NBR, HNBR | HFC | |

Note: For other fluids not included in above table, consult our technical office


5 GENERAL NOTES

RZME-A and CART RZME proportional valves are CE marked according to the applicable Directives (e.g. Immunity/Emission EMC Directive and Low Voltage Directive).

Installation, wirings and start-up procedures must be performed according to the general prescriptions shown in table F003 and in the installation notes supplied with relevant components.

6 SOLENOID CONNECTIONS


| SOLENOID POWER SUPPLY CONNECTOR | |
|---------------------------------|--------------------|
| PIN | Signal description |
| 1 | SUPPLY |
| 2 | SUPPLY |
| 3 | GND |




7 DIAGRAMS (based on mineral oil ISO VG 46 at 50 °C)

1 Regulation diagrams
with flow rate Q = 1 l/min

Note: The presence of counter pressure at port T can affect the effective pressure regulation.


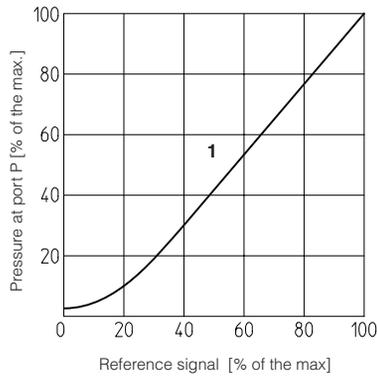


2 Pressure/flow diagrams
with reference signal set at Q = 1 l/min

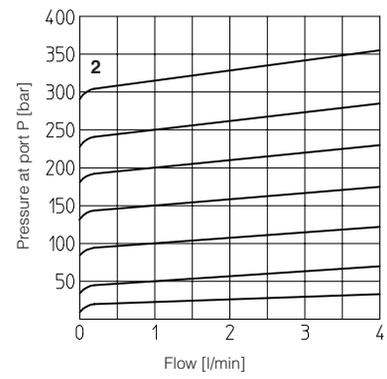


3-7 Min. pressure/flow diagrams
with zero reference signal

- 3 = pressure range: 50
- 4 = pressure range: 100
- 5 = pressure range: 210
- 6 = pressure range: 315
- 7 = pressure range: 350

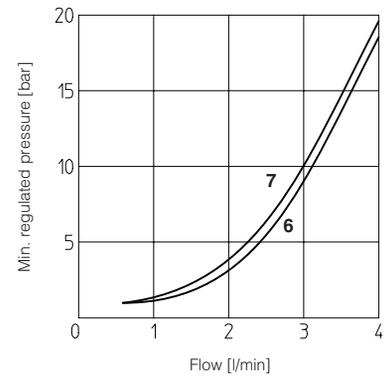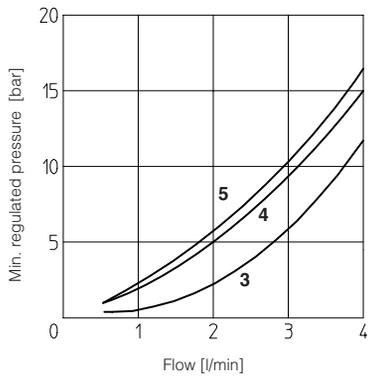

8 AIR BLEEDING


At the first valve commissioning the air eventually trapped inside the solenoid must be bled-off through the screw ① located at the rear side of the solenoid housing.
The presence of air may cause pressure instability and vibrations.

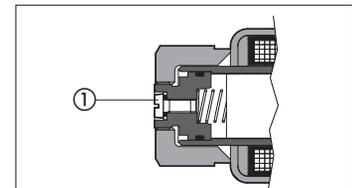

9 COILS TYPE WITH SPECIAL CONNECTORS


Options -J

Coil type COZEJ
AMP Junior Timer connector
Protection degree IP67



Options -K

Coil type COZEK
Deutsch connector, DT-04-2P male
Protection degree IP67



Options -S

Coil type COZES
Lead Wire connection
Cable length = 180 mm

