
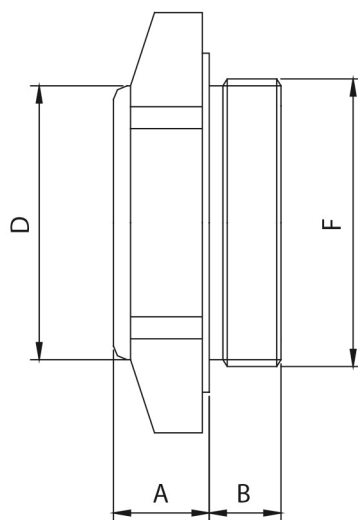
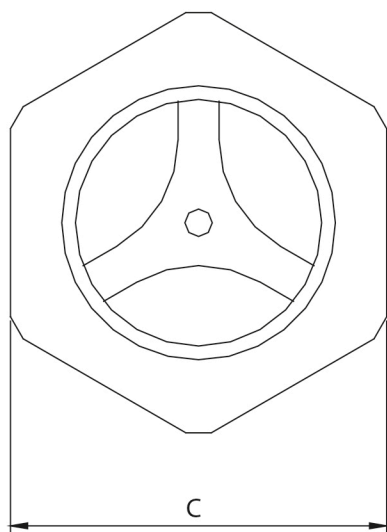
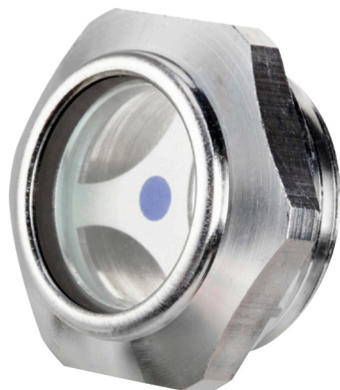


# LMA

## LIQUID LEVEL VISUAL INDICATOR PLUGS

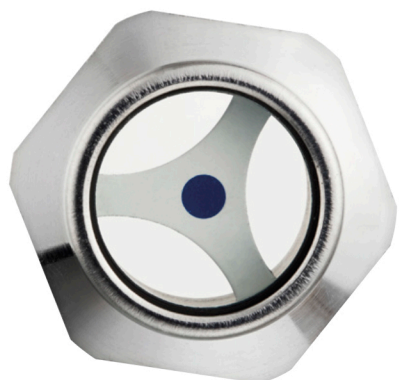

- Body in aluminium alloy D11S.
- Oilproof gasket. In aluminium or fibre on request.
- Suppliable in anodised aluminium or brass OT 58 on request, for adequate quantities.
- Sight window in thermoplastic material with optimum shock proofness, dimensional stability and not subject to ageing. The transparency of the sight window does not change at high temperatures.

The particular profile of the trim, in white prepainted aluminium, makes reading the liquid level easy, and also allows rapid downflow if the quantity of liquid decreases.

Tmax: 80°C

Pressure 5 Bar

Special on request:  
internal O-ring in Viton  
sight window in pyrex  
Tmax 200°C  
Pressure 10 Bar

GAS TYPE	F	A	B	C	D
LMA 1/4" GAS	1/4" GAS	8	8	17	16
LMA 3/8" GAS	3/8" GAS	9	9	22	18
LMA 1/2" GAS	1/2" GAS	10	9	27	21
LMA 3/4" GAS	3/4" GAS	10	11	32	27
LMA 1" GAS	1" GAS	11	10	40	32
LMA 1"1/4 GAS	1"1/4 GAS	14	12	50	40
LMA 1"1/2 GAS	1"1/2 GAS	13	13	55	40
METRIC TYPE	F	A	B	C	D
LMA 14x1,5	M 14x1,5	8	8	17	16
LMA 16x1,5	M 16x1,5	9	9	22	18
LMA 18x1,5	M 18x1,5	9	9	22	18
LMA 20x1,5	M 20x1,5	10	10	24	21
LMA 22x1,5	M 22x1,5	10	9	27	21