

ih INTERPUMP HY-BLAST→



COMPLETE RANGE OF HIGH PRESSURE HOSES FOR BLASTING AND JETTING APPLICATION

ih INTERPUMP ■■■ HY-BLAST→ 10k

ih INTERPUMP ■■■ HY-BLAST→ 12k

ih INTERPUMP ■■■ HY-BLAST→ 15k

ih INTERPUMP ■■■ HY-BLAST→ 18k


ih INTERPUMP ■■■ HY-BLAST→ 20k

I.M.M.
HYDRAULICS

ih INTERPUMP

HY-BLAST→

- High and Very High Working Pressures (up to 1450 bar)
- Designed According to ISO 7751 (safety factor 1:2,5)
- New reinforced fittings with double interlock section (Y series)
- Nuts with double axial micro-holes (Y series)
- High abrasion resistant rubber cover to ensure long life and reliability (more than 25 times less than EN and SAE std.)

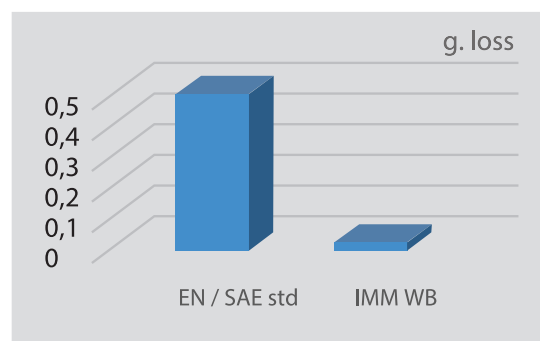

HY-BLAST→ 20k

Size	WP bar	Reinforcement	Ferrules	Fittings
3/8"	1450	6WS	00Y-06	Y series
1/2"	1450	6WS	00Y-06	Y series
3/4"	1350	6WS	00Y-06	Y series

HY-BLAST→ 18k

Size	WP bar	Reinforcement	Ferrules	Fittings
3/8"	1250	4WS	00Y4-06	Y series
1/2"	1200	4WS	00Y4-08	Y series

HY-BLAST→ 15k

Size	WP bar	Reinforcement	Ferrules	Fittings
1/4"	1100	4WS	0019-04	M series
3/8"	1100	4WS	00S4-06	W series
1/2"	1100	4WS	00S4-08	W series
3/4"	1000	4WS	00Y4-12	Y series

HY-BLAST→ 12k

Size	WP bar	Reinforcement	Ferrules	Fittings
1/4"	850	4WS	0019-04	M series
3/8"	850	4WS	00S4-06	W series
1/2"	850	4WS	00S4-08	W series
3/4"	850	4WS	00S4-12	W series

HY-BLAST→ 10k

Size	WP bar	Reinforcement	Ferrules	Fittings
1"	700	4WS	00S4-16	W series

Find more technical details in the IMM product catalogue

