




4 INTERPUMP LIFT AND MATERIAL HANDLIG APPLICATION



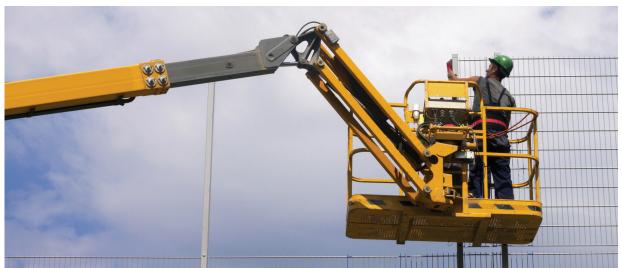

COMPACT STRUCTURE:


- Easy installation
- Space saving
- Lightness

HYGH FLEXIBILITY and SMALL BAND RADIUS:

• Reliability with low bend radius

PERFORMANCE:

• Tested up to 1.000.000 impulse cycles according to ISO 6803



HIGH OZONE AND ENVIRONMENTAL RESISTANCE:

720hrs @ 50 pphm and 40°C according to IS 7326

The high ozone resistance and elasticity of the IMM superior range cover ensures the best reliability also with small bend radius, avoiding the cover cracking.

Find more technical details in the IMM product catalogue

